

Sertifikaat

REPUBLIEK VAN SUID AFRIKA

PATENT KANTOOR
DEPARTEMENT VAN HANDEL
EN NYWERHEID



PCT/IB2005/01276

Certificate

REPUBLIC OF SOUTH AFRICA

PATENT OFFICE
DEPARTMENT OF TRADE AND
INDUSTRY

Hiermee word gesertifiseer dat
This is to certify that


The documents attached hereto are true copies of Form P2, P6 and provisional specification and drawings of South African Patent Application No. 2004/3618 in the name of Element Six (Pty) Ltd

Filed : 12 May 2004
Entitled : Cutting Tool Insert

Geteken te in die Republiek van Suid-Afrika, hierdie
PRETORIA
Signed at in the Republic of South Africa, this

13 May 2005

Registrar of Patents

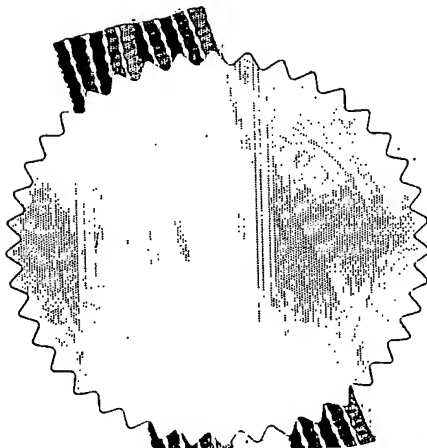

BEST AVAILABLE COPY

OFFICIAL APPLICATION		LODGING DATE: PROVISIONAL		ACCEPTANCE DATE			
21	01	2004 / 3618		22	12 MAY 2004	47	
INTERNATIONAL CLASSIFICATION		LODGING DATE: COMPLETE		GRANTED DATE			
51		23					
FULL NAME(S) OF APPLICANT(S)/PATENTEE(S)							
71	ELEMENT SIX (PTY) LTD						
APPLICANTS SUBSTITUTED:					DATE REGISTERED		
71							
ASSIGNEE(S)					DATE REGISTERED		
71							
FULL NAME(S) OF INVENTOR(S)							
72	ACHILLES, ROY DERRICK						
PRIORITY CLAIMED		COUNTRY		NUMBER		DATE	
N.B. Use International abbreviation for country (see Schedule 4)		33	NIL	31	NIL	32	NIL
TITLE OF INVENTION							
54	CUTTING TOOL INSERT						
ADDRESS OF APPLICANT(S)/PATENTEE(S)							
DEBID ROAD, NUFFIELD, SPRINGS, 1559, GAUTENG, SOUTH AFRICA							
ADDRESS FOR SERVICE					S & F REF		
74	SPOOR & FISHER, SANDTON				PA137190/P		
PATENT OF ADDITION NO.				DATE OF ANY CHANGE			
61							
FRESH APPLICATION BASED ON				DATE OF ANY CHANGE			

SPOOR & FISHER

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978

APPLICATION FOR A PATENT
AND ACKNOWLEDGEMENT OF RECEIPT
(Section 30 (1) - Regulation 22)

REPUBLIC OF SOUTH AFRICA
REVENUE

R 0060.00

HASR 711

IN DUPLICATE

REPUBLIC OF SOUTH AFRICA
S & F REFERENCE

The granting of a patent is hereby requested by the undermentioned applicant on the basis of the present application filed in duplicate

OFFICIAL APPLICATION NO.

21 01 **2004 / 3618**

PA137190/P

FULL NAME(S) OF APPLICANT(S)

71 **ELEMENT SIX (PTY) LTD**

ADDRESS(ES) OF APPLICANT(S)

DEBID ROAD, NUFFIELD, SPRINGS, 1559, GAUTENG, SOUTH AFRICA

TITLE OF INVENTION

54 **CUTTING TOOL INSERT**

THE APPLICANT CLAIMS PRIORITY AS SET OUT ON THE ACCOMPANYING FORM P.2. THE EARLIEST PRIORITY CLAIM IS:

COUNTRY: **NIL** NUMBER: **NIL** DATE: **NIL**

THIS APPLICATION IS FOR A PATENT OF ADDITION TO PATENT APPLICATION NO.

21 01

THIS APPLICATION IS A FRESH APPLICATION IN TERMS OF SECTION 37 AND IS BASED ON APPLICATION NO.

21 01

THIS APPLICATION IS ACCOMPANIED BY:

- ☒ 1. A single copy of a provisional specification of 11 pages.
- ☒ 2. Drawings of 1 sheet.
- ☐ 3. Publication particulars and abstract (Form P.8 in duplicate).
- ☐ 4. A copy of Figure of the drawings (if any) for the abstract.
- ☐ 5. Assignment of invention.
- ☐ 6. Certified priority document.
- ☐ 7. Translation of the priority document.
- ☐ 8. Assignment of priority rights.
- ☐ 9. A copy of the Form P.2 and the specification of S.A. Patent Application No.
- ☐ 10. Declaration and power of attorney on Form P.3.
- ☐ 11. Request for ante-dating on Form P.4.
- ☐ 12. Request for classification on Form P.9.
- ☒ 13. Form P.2 in duplicate.
- ☐ 14. Other.

74 ADDRESS FOR SERVICE: SPOOR & FISHER, SANDTON

Dated: 12 May 2004


SPOOR & FISHER
PATENT ATTORNEYS FOR THE APPLICANT(S)

REGISTRAR OF PATENTS DESIGNS,
TRADE MARKS AND COPYRIGHT

2004-05-12

RECEIVED
REGISTRAR OF PATENTS, MODELLE,
HANDELSMERKE EN OUTEURSREG

REGISTRAR OF PATENTS

REPUBLIC OF SOUTH AFRICA
PATENTS ACT, 1978

PROVISIONAL SPECIFICATION

(Section 30(1) – Regulation 27)

OFFICIAL APPLICATION NO.

LODGING DATE

21	01	• 2004 / 3618
----	----	---------------

22	12 MAY 2004
----	-------------

FULL NAMES OF APPLICANTS

71	ELEMENT SIX (PTY) LTD
----	-----------------------

FULL NAMES OF INVENTORS

72	ACHILLES, ROY DERRICK
----	-----------------------

TITLE OF INVENTION

54	CUTTING TOOL INSERT
----	---------------------

BACKGROUND OF THE INVENTION

This invention relates to tool inserts and more particularly to cutting tool inserts for use in drilling and coring holes in subterranean formations.

A commonly used cutting tool insert for drill bits is one which comprises a layer of polycrystalline diamond (PCD) bonded to a cemented carbide substrate. The layer of PCD presents a working face and a cutting edge around a portion of the periphery of the working surface.

Polycrystalline diamond, also known as a diamond abrasive compact, comprises a mass of diamond particles containing a substantial amount of direct diamond-to-diamond bonding. Polycrystalline diamond will generally have a second phase which contains a diamond catalyst/solvent such as cobalt, nickel, iron or an alloy containing one or more such metals.

In drilling operations, such a cutting tool insert is subjected to heavy loads and high temperatures at various stages of its life. In the early stages of drilling, when the sharp cutting edge of the insert contacts the subterranean formation, the cutting tool is subjected to large contact pressures. This results in the possibility of a number of fracture processes such as fatigue cracking being initiated.

As the cutting edge of the insert wears, the contact pressure decreases and is generally too low to cause high energy failures. However, this pressure can still propagate cracks initiated under high contact pressures; and can eventually result in spalling-type failures.

In the drilling industry, PCD cutter performance is determined by a cutter's ability to both achieve high penetration rates in increasingly demanding environments, and still retain a good condition post-drilling (hence enabling

re-use). In any drilling application, cutters may wear through a combination of smooth, abrasive type wear and spalling/chipping type wear. Whilst a smooth, abrasive wear mode is desirable because it delivers maximum benefit from the highly wear-resistant PCD material, spalling or chipping type wear is unfavourable. Even fairly minimal fracture damage of this type can have a deleterious effect on both cutting life and performance.

With spalling-type wear, cutting efficiency can be rapidly reduced as the rate of penetration of the drill bit into the formation is slowed. Once chipping begins, the amount of damage to the table continually increases, as a result of increased normal force now required to achieve a given depth of cut. Therefore, as cutter damage occurs and the rate of penetration of the drill bit decreases, the response of increasing weight on bit can quickly lead to further degradation and ultimately catastrophic failure of the chipped cutting element.

In optimising PCD cutter performance increasing wear resistance (in order to achieve better cutter life) is typically achieved by manipulating variables such as average diamond grain size, overall catalyst/solvent content, diamond density and the like. Typically, however, as PCD material is made more wear resistant it becomes more brittle or prone to fracture. PCD elements designed for improved wear performance will therefore tend to have poor impact strength or reduced resistance to spalling. This trade-off between the properties of impact resistance and wear resistance makes designing optimised PCD structures, particularly for demanding applications, inherently self-limiting.

If the chipping behaviours of more wear resistant PCD can be eliminated or controlled, then the potentially improved performance of these types of a PCD cutters can be more fully realised.

Previously, modification of the cutting edge geometry by bevelling was perceived to be a promising approach to reducing this chipping behaviour. It has been shown (US 5,437,343 and US 5,016,718) that pre-bevelling or

rounding the cutting edge of the PCD table significantly reduces the spalling tendency of the diamond cutting table. This rounding, by increasing the contact area, reduces the effect of the initial high stresses generated during loading when the insert contacts the earthen formation. However, this chamfered edge wears away during use of the PCD cutter and eventually a point is reached where no bevel remains. At this point, the resistance of the cutting edge to spalling-type wear will be reduced to that of the unprotected/unbevelled PCD material.

US 5,135,061 suggests that spalling-type behaviour can also be controlled by manufacturing the cutter with the cutting face formed of a layer of PCD material which is less wear resistant than the underlying PCD material(s), hence reducing its tendency to spall. The greater wear of the less wear resistant layer in the region of the cutting edge provides a rounded edge to the cutting element where it engages the formation. The rounding of the cutting edge achieved by this invention hence has a similar anti-spalling effect to bevelling. The advantages of this approach can be significantly outweighed by the technical difficulty of achieving a satisfactorily thin, less wear resistant layer *in situ* during the synthesis process. (The consistent and controlled behaviour of this anti-spalling layer is obviously highly dependant on the resultant geometry). In addition, the reduced wear resistance of this upper layer can begin to compromise the overall wear resistance of the cutter – resulting in a more rapid blunting of the cutting edge and sub-optimal performance.

JP 59119500 claims an improvement in the performance of PCD sintered materials after a chemical treatment of the working surface. This treatment dissolves and removes the catalyst/solvent matrix in an area immediately adjacent to the working surface. The invention is claimed to increase the thermal resistance of the PCD material in the region where the matrix has been removed without compromising the strength of the sintered diamond.

A PCD cutting element has recently been introduced on to the market which is said to have improved wear resistance without loss of impact

strength. United States Patents US 6,544,308 and 6,562,462 describe the manufacture and behaviour of such cutters. The PCD cutting element is characterised *inter alia* by a region adjacent the cutting surface which is substantially free of catalysing material. The improvement of performance of these cutters is ascribed to an increase in the wear resistance of the PCD in this area; where the removal of the catalyst material results in decreased thermal degradation of the PCD in the application.

Whilst removing the catalyst/solvent in this region substantially reduces the incidence of the highly detrimental spalling failure on the leading edge, spalling-type failure on the trailing edge, which originates from characteristic lamellar-type cracking in this region, can also have a significant effect on performance. Although the stresses in the region of the trailing edge are not as high as those on the leading edge, cracking in this area can cause substantial material loss and hence degrade the performance of the cutter.

SUMMARY OF THE INVENTION

According to the present invention, there is provided a polycrystalline diamond abrasive element, particularly a cutting element, comprising a layer of polycrystalline diamond, preferably of a high grade, bonded to a substrate, particularly a cemented carbide substrate, along an interface, the polycrystalline diamond layer having a working surface opposite the interface and an outer peripheral surface, extending between the working surface and the interface, the polycrystalline diamond abrasive element being characterised by respective regions adjacent the working surface and the peripheral surface being lean in catalysing material and a region rich in catalysing material.

As a consequence, the polycrystalline diamond layer comprises an annular region extending away from the working surface which is lean in catalysing material such that in use, as a wear scar develops, both the leading edge

and the trailing edge thereof are located in a region lean in catalysing material.

The polycrystalline diamond abrasive element is preferably as described in any one or more of co-pending South African provisional patent applications 2003/4096, 2003/8698, 2003/9629 and 2004/1265, all of which are incorporated herein by reference.

The polycrystalline diamond layer has a region adjacent the working surface which is lean in catalysing material. Generally, this region will be substantially free of catalysing material. The region will extend into the polycrystalline diamond from the working surface generally to a depth of as low as 30µm to no more than 500 microns.

The polycrystalline diamond layer also has a region adjacent the peripheral surface which is lean in catalysing material. This region extends laterally into the polycrystalline diamond from the peripheral surface generally to a depth of 30µm to 500µm. This region also extends from the peripheral edge of the working surface towards the interface to a depth of at least half the overall thickness of the polycrystalline diamond layer, but stops short of the interface by at least 500µm.

The polycrystalline diamond also has a region rich in catalysing material. The catalysing material is present as a sintering agent in the manufacture of the polycrystalline diamond layer. Any diamond catalysing material known in the art may be used. Preferred catalysing materials are Group VIII transition metals such as cobalt and nickel. The region rich in catalysing material will generally have an interface with the region lean in catalysing material and extend to the interface with the substrate.

The region rich in catalysing material may itself comprise more than one region. The regions may differ in average particle size, as well as in chemical composition. These regions, when provided, will generally lie in planes parallel to the working surface of the polycrystalline diamond layer.

According to another aspect of the invention, a method of producing a PCD abrasive element as described above includes the steps of creating an unbonded assembly by providing a substrate, which may include a non-planar interfacial surface, placing a mass of diamond particles on the substrate, the mass of diamond particles preferably being selected so as to be capable of producing high grade polycrystalline diamond, and providing a source of catalysing material for the diamond particles, subjecting the unbonded assembly to conditions of elevated temperature and pressure suitable for producing a polycrystalline diamond layer of the mass of diamond particles, such layer being bonded to the substrate, and removing catalysing material from respective regions of the polycrystalline diamond layer adjacent the exposed working and peripheral surfaces thereof, respectively.

The catalysing material is preferably removed to a depth of at least half the overall thickness of the polycrystalline diamond layer.

The substrate will generally be a cemented carbide substrate. The source of catalysing material will generally be the cemented carbide substrate. Some additional catalysing material may be mixed in with the diamond particles.

Catalysing material is removed from the regions of the polycrystalline diamond layer adjacent the exposed surfaces thereof. Generally, these surfaces are on a side of the polycrystalline layer opposite to the substrate, which provides a working surface for the polycrystalline diamond layer, and a peripheral surface extending between the working surface and the substrate. Removal of the catalysing material may be carried out using methods known in the art such as electrolytic etching, acid leaching and evaporation techniques.

The conditions of elevated temperature and pressure necessary to produce the polycrystalline diamond layer from a mass of diamond particles are well

known in the art. Typically, these conditions are pressures in the range 4 to 8 GPa and temperatures in the range 1300 to 1700°C.

Further according to the invention, there is provided a rotary drill bit containing a plurality of cutter elements, substantially all of which are PCD abrasive elements, as described above.

The invention extends to a method of reducing, preferably eliminating, spalling and/or chipping type wear in a polycrystalline diamond abrasive element susceptible to such wear, including the step of removing catalysing material from regions of the polycrystalline diamond layer adjacent both exposed surfaces thereof.

It has been found that the PCD abrasive elements of the invention have significantly improved wear behaviour, as a result of controlling the spalling and chipping wear component, than PCD abrasive elements of the prior art.

BRIEF DESCRIPTION OF THE DRAWING

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings in which:

Figure 1 is a perspective view of a preferred embodiment of a polycrystalline diamond abrasive element of the invention; and

Figure 2 is a cross-sectional side view along the line 2-2 of the polycrystalline diamond abrasive element of Figure 1.

DETAILED DESCRIPTION OF THE INVENTION

The polycrystalline diamond abrasive element of the invention has particular application as a cutter element for drill bits. In this application, it has been found to have excellent wear resistance and impact strength without being susceptible to spalling or chipping in either the leading edge or trailing edge of the typical wear scar. These properties allow it to be used effectively in drilling or boring of subterranean formations having high compressive strength.

Referring to Figures 1 and 2 of the accompanying drawings, the cutting element 10 has a polycrystalline diamond layer 12, bonded to a substrate 14. The polycrystalline diamond layer has an upper working surface 16 around which is a peripheral cutting edge 18 and a peripheral surface 20.

The polycrystalline diamond layer 12 has respective regions 22,24 lean in catalysing material and a region 26 rich in catalysing material. The regions 22,24 lean in catalysing material extend respectively from the working surface 16 and peripheral surface 20 into the polycrystalline diamond layer 12. The depth of each region, as it extends laterally away from the respective surface 16,20, will typically be no more than 500 microns, and is preferably 30 to 400 microns, most preferably 60 to 350 microns. In addition, the region 24 extends to a depth, from the working surface 16 towards the substrate 14, of at least half the overall thickness of the polycrystalline diamond layer 12, but preferably stops short of the interface region 28 by at least 500 μ m in order to prevent inadvertant leaching of the interface region 28.

Typically, if the PCD edge is bevelled, the regions 22,24 lean in catalysing material will generally follow the shape of this bevel and extend along the length of the bevel. The balance of the polycrystalline diamond layer 12 extending to the cemented carbide substrate 14 is the region 26 rich in catalysing material. In addition, the surfaces 16,20 of the PCD element may be mechanically polished so as to achieve a low-friction surface or finish.

In use, as the PCD layer 12 contacts a substrate to be drilled, it develops a wear scar 30 having a leading edge 32 and a trailing edge 34. By providing respective regions 22,24 lean in catalysing material, as the wear scar 30 develops both the leading edge 32 and the trailing edge 34 are located in a region lean in catalysing material. Thus the previously perceived advantages of removing catalyst material from the working surface of a PCD abrasive element are now extended to the trailing edge 34, further improving the performance thereof in use.

Generally, the layer of polycrystalline diamond 12 will be produced and bonded to the cemented carbide substrate 14 by methods known in the art. Thereafter, catalysing material is removed from the working surface 16 and peripheral surface 20 of the particular embodiment using any one of a number of known methods. One such method is the use of a hot mineral acid leach, for example a hot hydrochloric acid leach. Typically, the temperature of the acid will be about 110°C and the leaching times will be 3 to 60 hours. The area of the polycrystalline diamond layer which is intended not to be leached and the carbide substrate will be suitably masked with acid resistant material.

In producing the polycrystalline diamond abrasive elements described above, a layer of diamond particles, optionally mixed with some catalysing material, will be placed on a cemented carbide substrate. This unbonded assembly is then subjected to elevated temperature and pressure conditions to produce polycrystalline diamond of the diamond particles bonded to the cemented carbide substrate. The conditions and steps required to achieve this are well known in the art.

The diamond particles will preferably comprise a mix of diamond particles, differing in average particle sizes. In one embodiment, the mix comprises particles having five different average particle sizes as follows:

**Average Particle Size
(in microns)**


20 to 25 (preferably 22)
10 to 15 (preferably 12)
5 to 8 (preferably 6)
3 to 5 (preferably 4)
less than 4 (preferably 2)

Percent by mass

25 to 30 (preferably 28)
40 to 50 (preferably 44)
5 to 10 (preferably 7)
15 to 20 (preferably 16)
less than 8 (preferably 5)

In another embodiment, the polycrystalline diamond layer comprises two layers differing in their mix of particles. The first layer, adjacent the working surface, has a mix of particles of the type described above. The second layer, located between the first layer and the substrate, is one in which (i) the majority of the particles have an average particle size in the range 10 to 100 microns, and consists of at least three different average particle sizes and (ii) at least 4 percent by mass of particles have an average particle size of less than 10 microns. Both the diamond mixes for the first and second layers may also contain admixed catalyst material.

DATED THIS 12th DAY OF MAY 2004

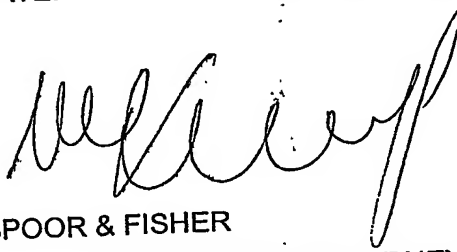

SPOOR & FISHER
APPLICANT'S PATENT ATTORNEYS

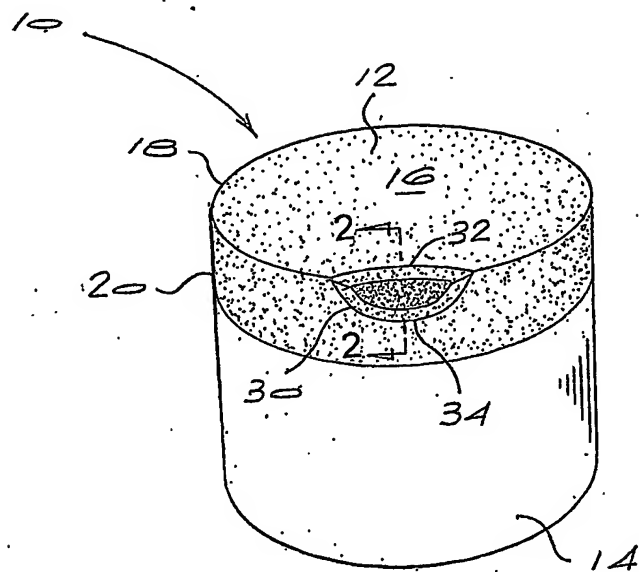


Fig.1

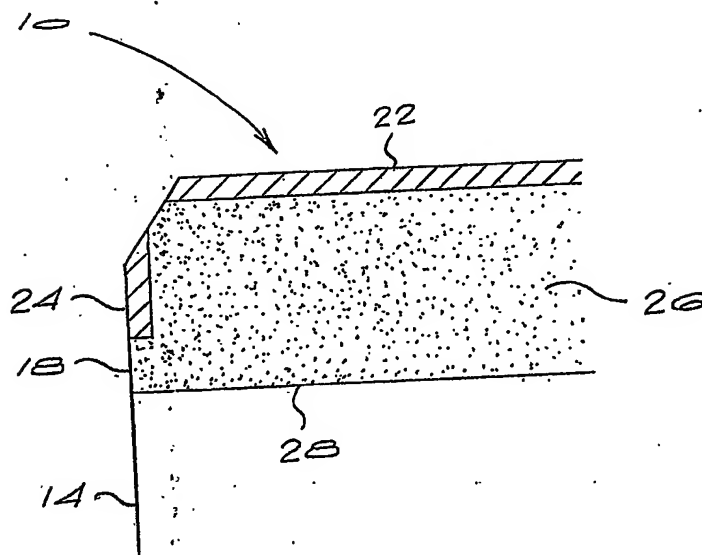


Fig.2

BEST AVAILABLE COPY


SPOOR & FISHER
Applicant's Patent Attorneys

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IB05/001276

International filing date: 11 May 2005 (11.05.2005)

Document type: Certified copy of priority document

Document details: Country/Office: ZA
Number: 2004/3618
Filing date: 12 May 2004 (12.05.2004)

Date of receipt at the International Bureau: 10 June 2005 (10.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse